

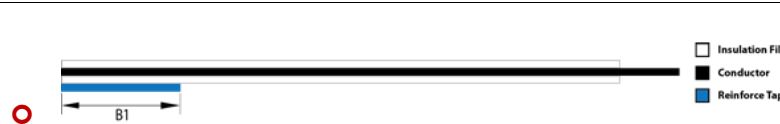



ONLINE FLEXIBLE FLAT CABLE SAMPLE REQUEST FORM

Customer Name		Application	
Contact Detail		Application Function	
Customer Part Number		Monthly Quantity	

SPECIFICATION

Numbers of Conductors/Pins		Total Length	
Pitch	<input type="radio"/> 0.30 mm <input type="radio"/> 0.50 mm <input type="radio"/> 1.00 mm <input type="radio"/> 1.25 mm <input type="radio"/> Other	Terminal Length /Conductor Length	<input type="radio"/> 3 mm <input type="radio"/> 4 mm <input type="radio"/> 5 mm <input type="radio"/> 6 mm <input type="radio"/> Other
Wire Width / Conductor Width	<input type="radio"/> 0.30 mm <input type="radio"/> 0.50 mm <input type="radio"/> 0.70 mm <input type="radio"/> 0.80 mm <input type="radio"/> Other	Wire Thickness /Conductor Thickness	<input type="radio"/> 35µm <input type="radio"/> 50 µm <input type="radio"/> 100 µm <input type="radio"/> Other
Reinforcing Tape /Supporting Tape	<input type="radio"/> 6mm <input type="radio"/> 8mm <input type="radio"/> 10mm <input type="radio"/> 15mm <input type="radio"/> Other	Insulation Film	<input type="radio"/> Pb-Free <input type="radio"/> Halogen Free <input checked="" type="radio"/> 37 µm <input checked="" type="radio"/> 43 µm <input checked="" type="radio"/> 60 µm
Shielding Material	<input type="radio"/> Aluminium Foil <input type="radio"/> Copper Foil <input type="radio"/> Silver Foil <input type="radio"/> Other	Product Finishing	<input type="radio"/> Pb-Free <input type="radio"/> Whisker Controlled Type <input type="radio"/> Au- Plating / Gold Plating <input type="radio"/> Impedance Controlled Type

Type S Reinforcement tape at both ends of cable, on the same side	
Type W Reinforcement tape at both ends of cable, on the opposite side	
Type B Single Reinforcement tape at one end and no Reinforcement tape at other end	
Type D No Reinforcement tape	

Remark

Upload Drawing / Specification :

